

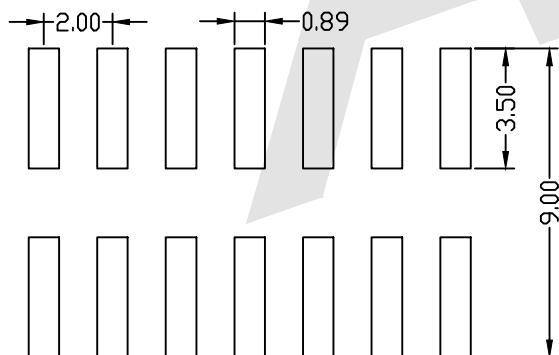



HSF

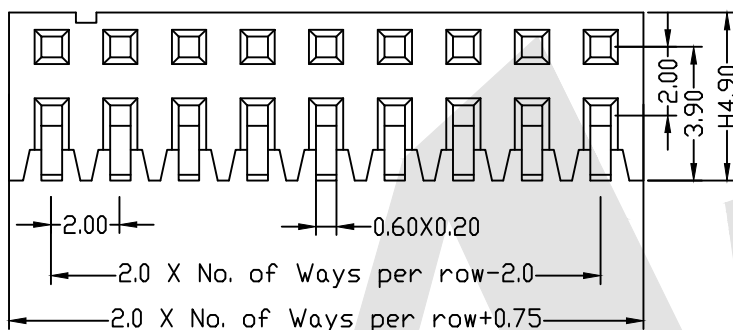

RoHS

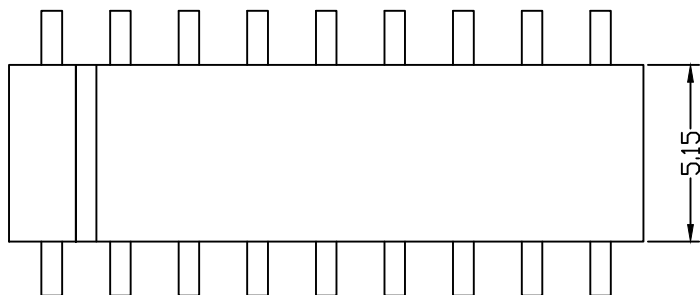

PCB LAYOUT

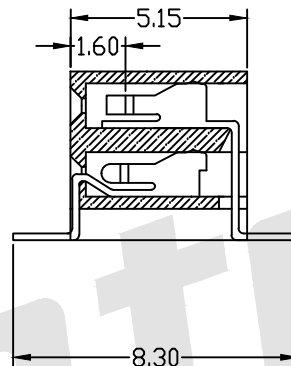

SPECIFICATION

Current Rating:	1.5Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65 °C to +125 °C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black


Ordering Code:

FHDM16 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{X}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$

- ① Series No:
② No. of Contacts
02 To 80
③ Contact Plating:
G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
④ Connector Type
D: Dual
⑤ Plastic High:
H:4.9
Please mark the
desired length in the H
⑥ Insulator Material
B:PA6T
C:LCP
D:PA46
E:PA9T
⑦ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE:
As Shown UNIT:
mm
DRAW
YG ZHONG DATE
01/05/2016
CHECK
BobYang DATE
01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.00mm Female Header Dual Row SMT Side Insert Type

DRAWING NO: FHDM16-XXDXXX

PRODUCT NO: FHDM16-XXDXXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8