

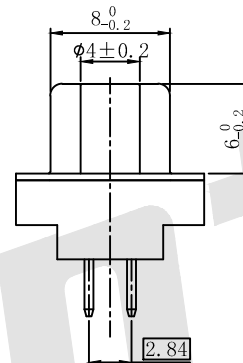
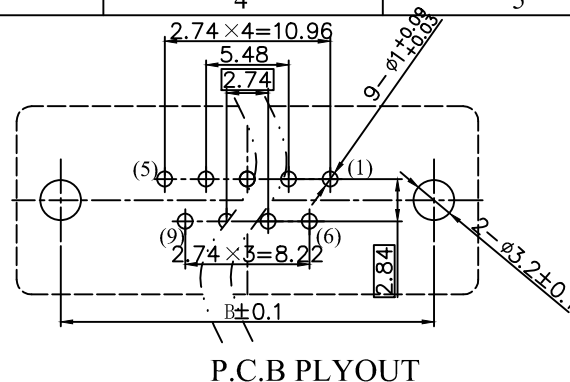
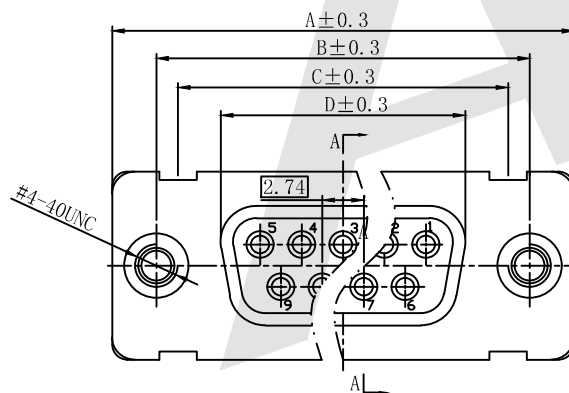
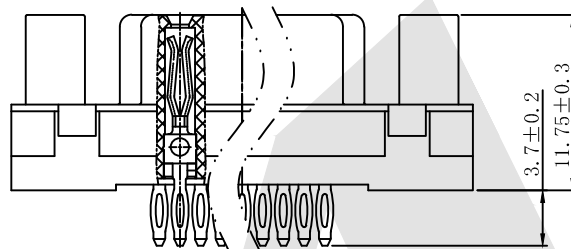


HSF  R6HS

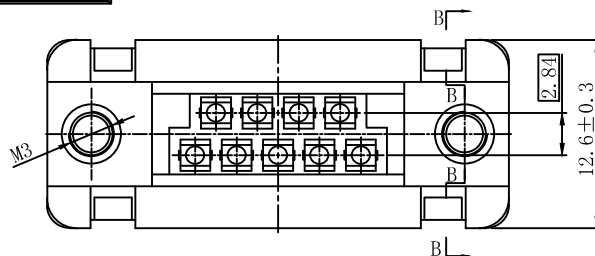

MATERIAL:

1. Insuiator:PBT+30%Glass Fiber (UL94V-0)
2. Contact:Brass
- 3.Contaot Plated:Glod Fiash over Nickel
4. Shell:Stell,Nickel Plated

SPECIFICATION:

1. Current Rating:5 AMPS
- 2.Lusulation Resistance: 1000M MIN. At 500VDC
- 3.Dielectric Strength: 500V for One minute
- 4.0 peration Temperatur: -55 C~+105 C.

Ordering Code:

HDP04 - F - X - A - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Dual Row Solder Type

② Contact Type:
F:Female

③ Contact NO. :
09pin 15pin
25pin 37pin

④ Mounting Option:
A: No accessories

⑤ Accessories:
0:Non Accessories
A: Zinc alloy 4.8mm Nickel
A1:Zinc alloy 5.8mm Nickel
B: Iron 4.8mm Nickel
B1:Iron 5.8mm Nickel
C: Copper alloy 4.8mm Nickel
C1:Copper alloy 5.8mm Nickel
D: Copper screw 4.8mm Nickel
D1:Copper screw 5.8mm Nickel

⑥ Color Code:

W:White L:Blue
B:Black G:Grey

⑦ Contact Plating

S: Selective Gold
S1:Selective 3u" Gold
S2:Selective 5u" Gold
S3:Selective 10u" Gold
S4:Selective 15u" Gold
S5:Selective30u" Gold
G0: Gold flash
G1: 3u" Gold over
G2: 5u" Gold over
G3: 10u" Gold over
G4: 15u" Gold over
G5: 30u" Gold over

PART NO:	A	B	C	D
9 pin	30.9	25	22.1	16.46
15 pin	39.1	33.32	30.5	24.79
25 pin	53.1	47.04	44.5	38.51
37 pin	69.4	63.50	60.7	54.97

Unless Otherwise specified tolerance
X.±0.35 X.XX:±0.20
X.X:±0.25 X.XXX:±0.15

SCALE:
As Shown
DRAW
Lv Xun Hua
CHECK
BobYang



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
D-SUB PCB Female Dual Row Straight
Type(stamped Pin)

DRAWING NO: HDP04-FXAXXX

PRODUCT NO: HDP04-FXAXXX

REV DESCRIPTION

DATE