

HSF



RoHS

SPECIFICATION


Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T, UL 94V-0 Black

Ordering Code:

PHCM13 - $\frac{X}{1}$ - $\frac{X}{2}$ - $\frac{D}{3}$ - $\frac{A-C-D-W}{4}$ - $\frac{X}{5}$ - $\frac{X}{6}$ - $\frac{X}{7}$ - $\frac{X}{8}$ - $\frac{X}{9}$

- ① Series No:
② No. of Contacts
02 To 100
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
D: Dual
⑤ Pin Length:
A: 0300=3.00mm
C: 0650=6.50mm
D: 0020=0.20mm
W: 0550=5.50mm
Please mark the desired length
in the A/C/D/W
⑥ Insulator Material
B: PA6T
C: LCP
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High
H1: 1.0mm
H2: 1.5mm
⑨ With locating pegs
option
A: Type A without pegs
无定位柱
B: Type B with pegs

PCB LAYOUT

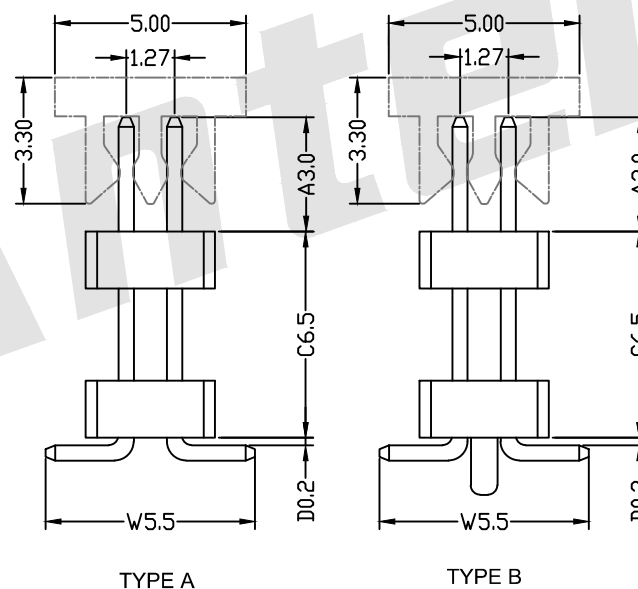

TYPE A

TYPE B

Standard IE P/N :

PHCM13-10 - G0 -D - 0300-0650-0020-0550 - B - B - H2 - A

A	C	D	W	Unless Otherwise specified tolerance	
3.0	6.5	0.2	5.5	X. ± 0.35	X. XX: ± 0.20
				X. X: ± 0.25	X. XXX: ± 0.15
Optional				SCALE: As Shown	UNIT: mm
				DRAW YG ZHONG	DATE 12/11/2015
				CHECK BobYang	DATE 12/11/2015



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:


1.27mm Pin Header Dual Row SMT Type

DRAWING NO:

PHCM13-XXD-0300-0650-0020-0550-XXXX

PRODUCT NO:

PHCM13-XXD-0300-0650-0020-0550-XXXX





3rd ANGLE PROJECTION

Increase packing method and material

2016/10/25

DATE

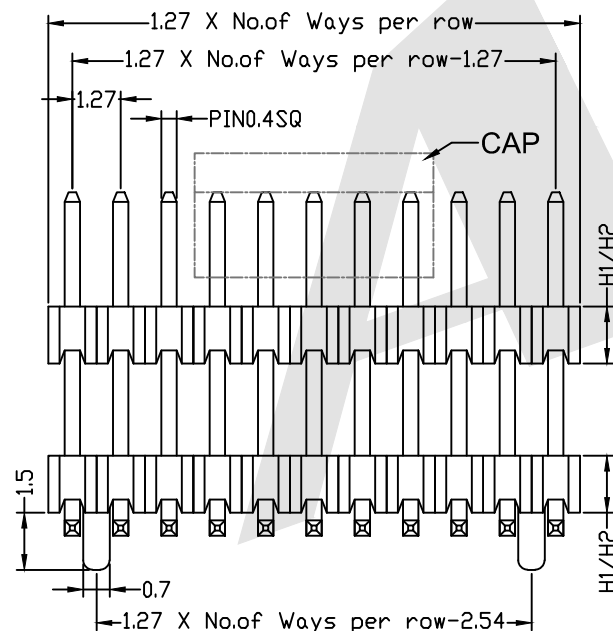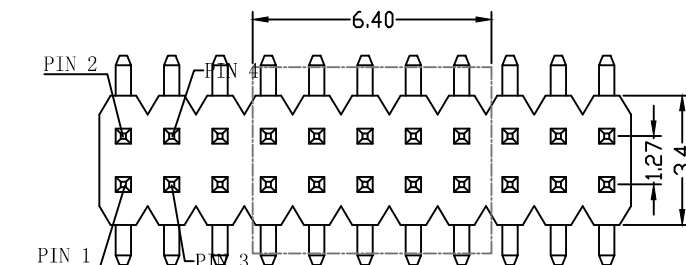

REV

DESCRIPTION